

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



MCR temperature transducer, for Pt 100, 2-, 3-, 4-conductor technology; input: 0 ... 100°C, 0 ... 150°C, 0 ... 200°C, 0 ... 300°C, -50 ... +50°C, -50 ... 100°C, -50 ... 150°C, -50 ... 250°C, output signal: 0(4) ... 20 mA

Your advantages

- Temperature range can be set via DIP switches
- With electrically isolated supply voltage as an option
- ZERO/SPAN adjustment
- Wire-break detection

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Commercial Data

Item number	2810353
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Product Key	CK1821
Catalog Page	Page 138 (C-7-2013)
Weight per Piece (including packing)	139 g
Weight per Piece (excluding packing)	138.4 g
Customs tariff number	85437090
Country of origin	DE

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Technical Data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Temperature transmitter
--------------	-------------------------

Electrical properties

Alignment span	± 5 %
Alignment zero	± 5 %
Limit frequency (3 dB)	30 Hz
Maximum power dissipation for nominal condition	900 mW
Test voltage power supply/signal	750 V AC (50 Hz, 60 s)
Step response (10-90%)	11 ms
Maximum temperature coefficient	≤ 0.02 %/K
Maximum transmission error	≤ 0.4 % (of final value)

Supply

Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	45 mA

Input data

Signal

Input signal	Temperature
--------------	-------------

Measurement

Configurable/programmable	Yes
Sensor types (RTD) that can be used	Pt 100 (IEC 60751/EN 60751)
Temperature measuring range	0 °C ... 300 °C (0 ... 100/150/200/300) -50 °C ... 250 °C (-50 ... 50/100/150/250)
Sensor type:	-50 °C ... 50 °C (fixed setting) -50 °C ... 100 °C (fixed setting) -50 °C ... 150 °C (fixed setting) -50 °C ... 250 °C (fixed setting) 0 °C ... 100 °C (fixed setting) 0 °C ... 150 °C (fixed setting) 0 °C ... 200 °C (fixed setting) 0 °C ... 300 °C (fixed setting)
Sensor input current	approx. 1 mA
Connection technology	2-, 3-, 4-conductor
Connection method	Pluggable screw connection

Resistance thermometer measuring transducer - MCR-PT100-I

2810353

<https://www.phoenixcontact.com/il/products/2810353>

Output data


Signal:

Output name	Current output
Current output signal	4 mA ... 20 mA
	0 mA ... 20 mA
Max. current output signal	30 mA
Output current with wire break	> 22 mA
Load/output load current output	$\leq 500 \Omega$

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Dimensions

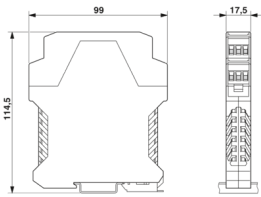Dimensional drawing	
Width	17.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Housing material	Polyamide PA non-reinforced
------------------	-----------------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C

Approval data

CE

Certificate	CE-compliant
-------------	--------------

UL, USA / Canada

Identification	UL 508 Recognized
----------------	-------------------

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Mounting

Mounting position

any


Resistance thermometer measuring transducer - MCR-PT100-I

2810353


<https://www.phoenixcontact.com/il/products/2810353>

Drawings

Dimensional drawing

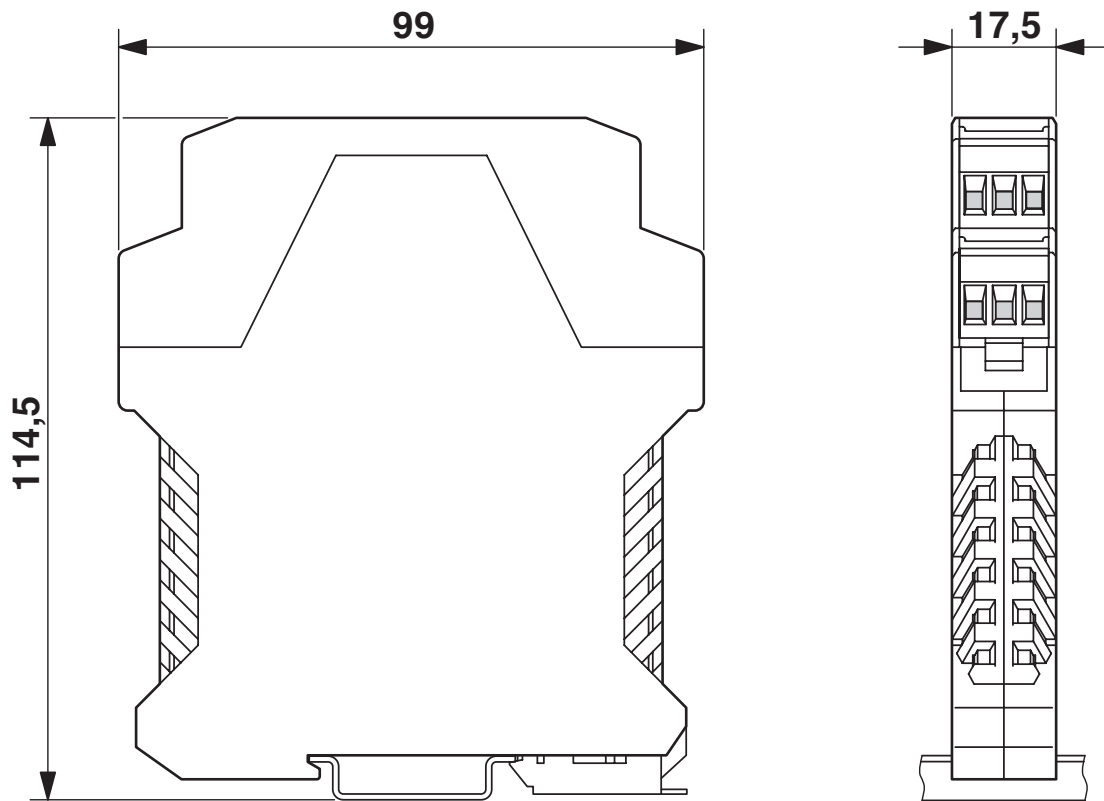

Application drawing

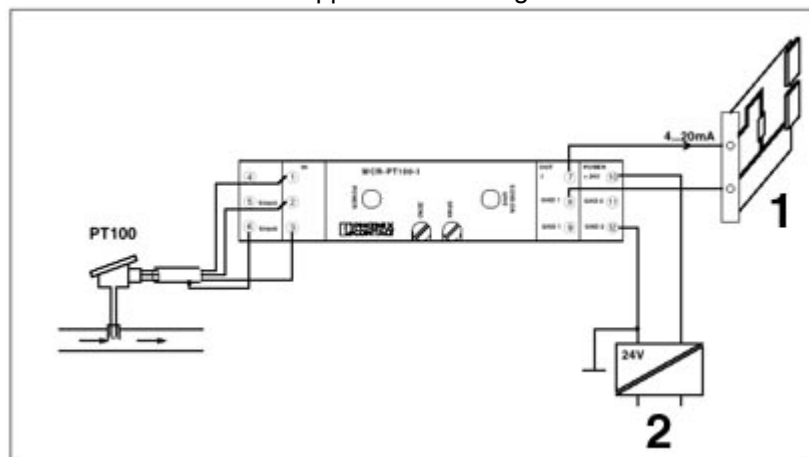

Application example: temperature measurement in 3-conductor technology

1 = controller


2 = mains voltage

Resistance thermometer measuring transducer - MCR-PT100-I

2810353

<https://www.phoenixcontact.com/il/products/2810353>

Circuit diagram

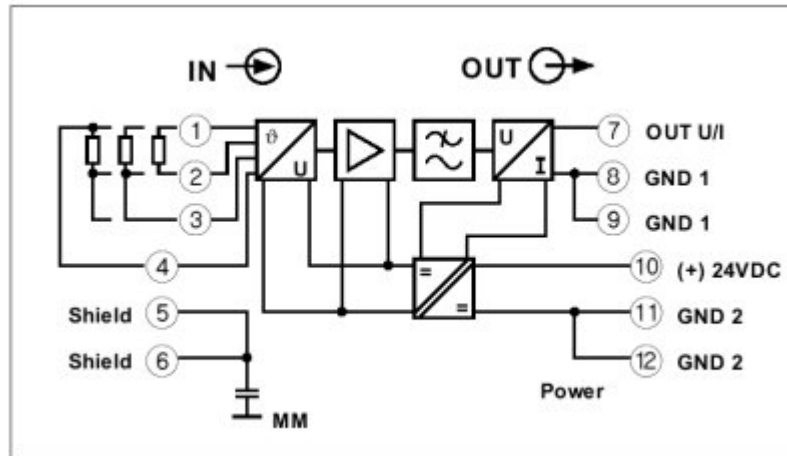

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Classifications

ECLASS

ECLASS-9.0	27210129
ECLASS-10.0.1	27210129
ECLASS-11.0	27210129

Resistance thermometer measuring transducer - MCR-PT100-I



2810353

<https://www.phoenixcontact.com/il/products/2810353>

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Israel Ltd.
P.O.B. 1799 Industrial Park Hasharon
Quadima 60920
+972-9-8915700
info@phoenixcontact.co.il