

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Test disconnect terminal block, with two test sockets for 4 mm test plugs, or for receiving bridge bars or screw bridges, nom. voltage: 400 V, nominal current: 41 A, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- Easy and clear testing in current transformer secondary circuits can be performed using the test disconnect terminal blocks of the URTK/S range
- On both sides of the disconnect point, the terminal block has a test socket which can also be used to switch across to neighboring terminal blocks

Commercial Data

Item number	0311087
Packing unit	50 pc
Minimum order quantity	1 pc
Product Key	BE1233
Catalog Page	Page 519 (C-1-2019)
GTIN	4017918001292
Weight per Piece (including packing)	35.51 g
Weight per Piece (excluding packing)	35.51 g
Customs tariff number	85369010
Country of origin	DE

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Technical Data

Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²

1 level

Screw thread	M4
Tightening torque	1.2 ... 1.5 Nm
Stripping length	13 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section solid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross section)
Nominal voltage	400 V
Nominal cross section	6 mm ²

Dimensions

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Width	8.2 mm
End cover width	2.2 mm
Height NS 35/15	59 mm
Height NS 35/7,5	51.5 mm
Height	2.028 "
Height NS 32	56.5 mm
Length	72 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature \leq 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3


Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Circuit diagram

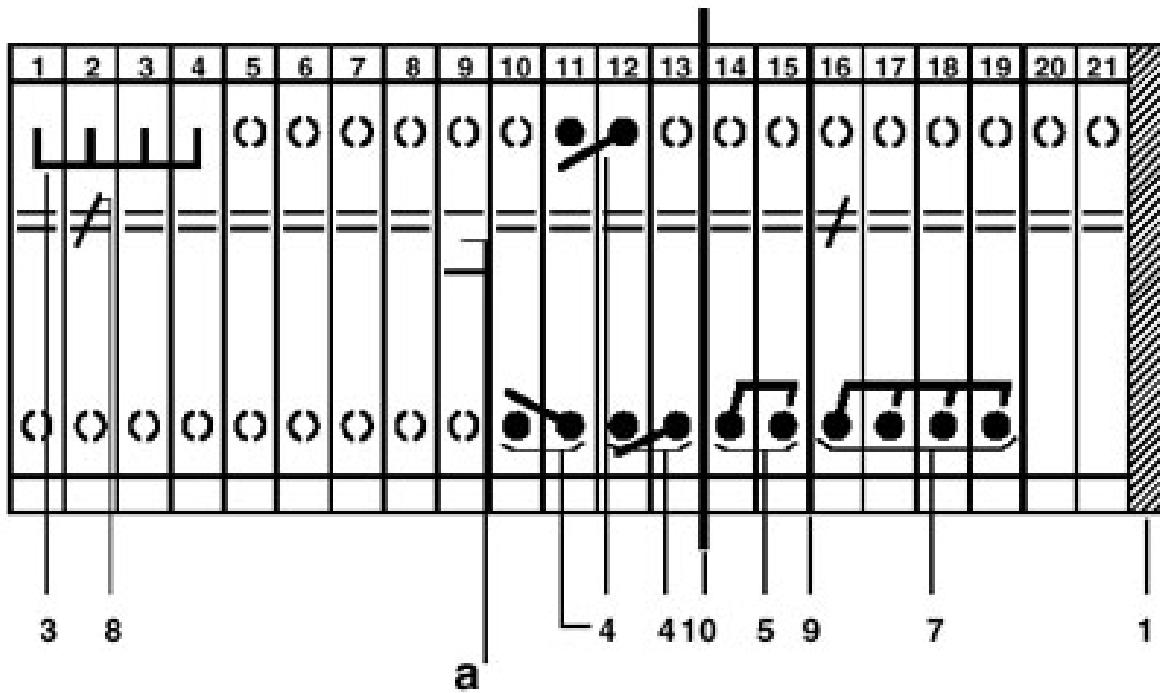


Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>



Schematic diagram

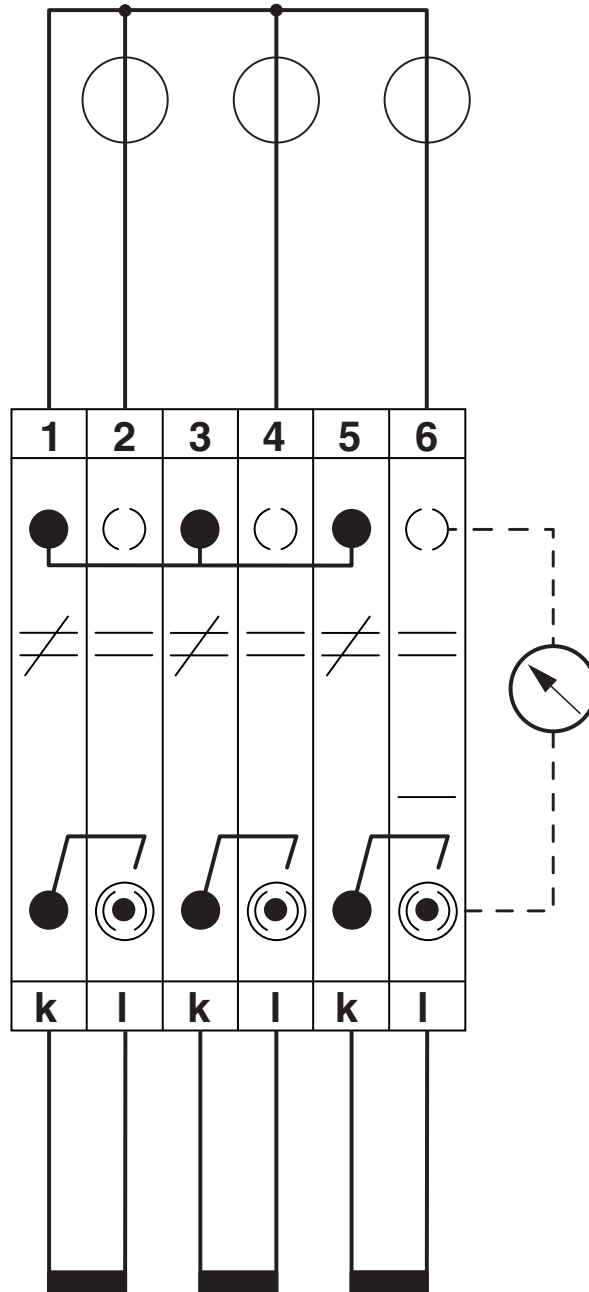

Three-phase transducer test set

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Circuit diagram




Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Schematic diagram

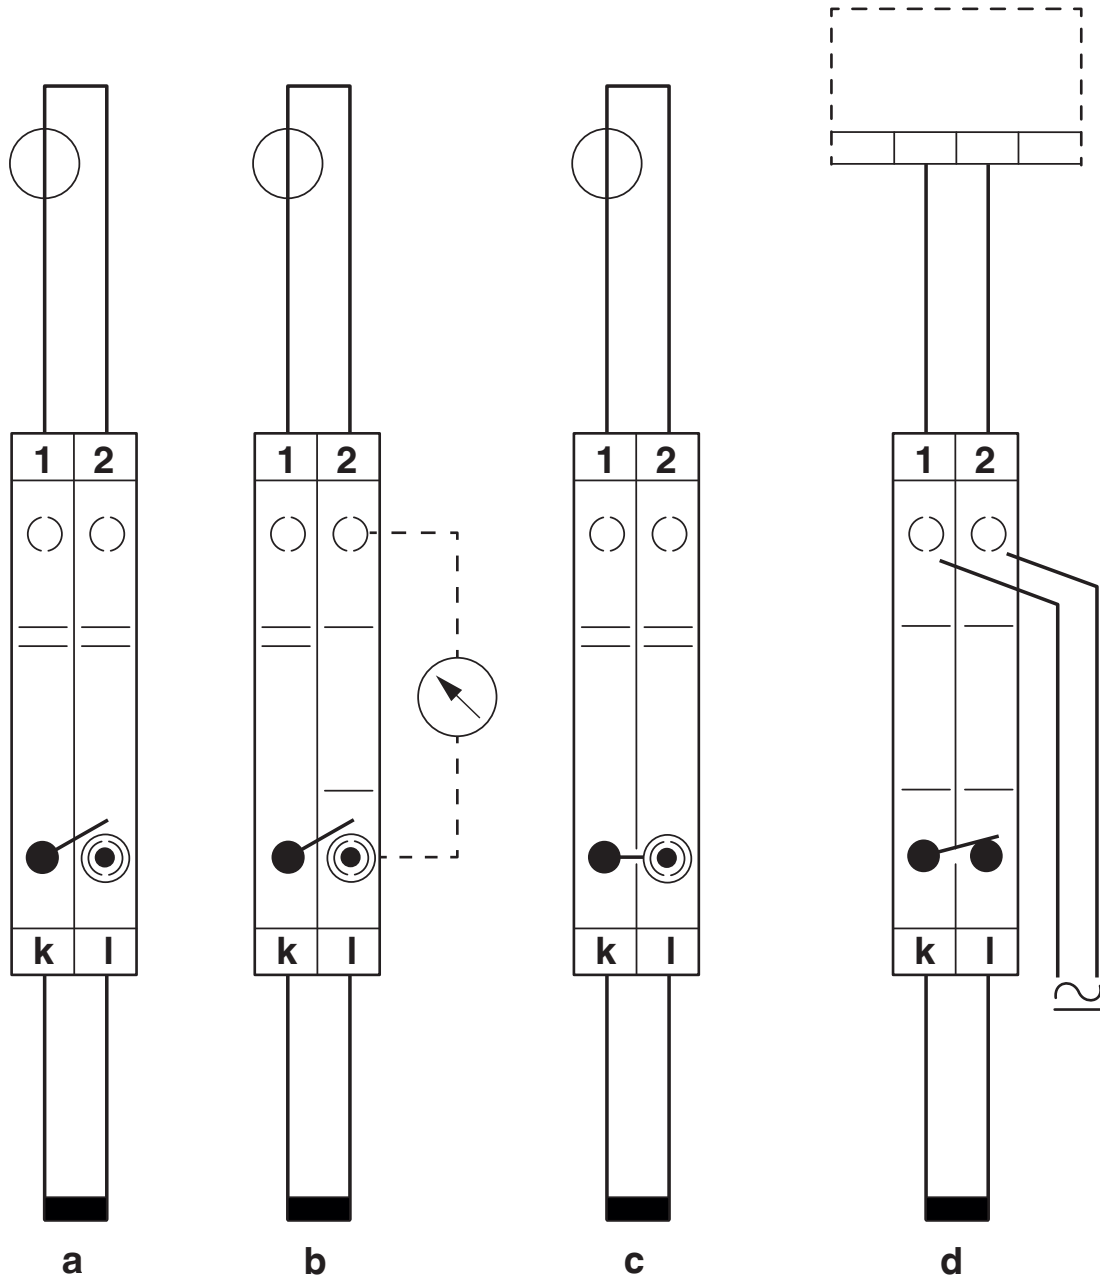

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer short-circuit

d = relay testing

Test disconnect terminal block - URTK/S




0311087


<https://www.phoenixcontact.com/pc/products/0311087>

Approvals


 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	300 V	40 A	26 - 10	-


 IECEE CB Scheme Approval ID: NL-65058				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	400 V		-	- 6

 EAC Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	300 V	50 A	26 - 8	-
Use group C	300 V	50 A	26 - 8	-

 KEMA-KEUR Approval ID: 71-113436				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	400 V		-	- 6

 LR Approval ID: LR2041789TA				
---	--	--	--	--

 RS Approval ID: 22.44.01.00083.250				
--	--	--	--	--

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Classifications

ECLASS

ECLASS-9.0	27141126
ECLASS-10.0.1	27141126
ECLASS-11.0	27141126

ETIM

ETIM 8.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Accessories

 Note: Applying some accessories below might limit this product.


Screw bridge

Screw bridge - FB 10- RTK/S - 0311171

<https://www.phoenixcontact.com/pc/products/0311171>



Screw bridge, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 41 A

Insertion bridge

Insertion bridge - EB 2- 8 - 0202154

<https://www.phoenixcontact.com/pc/products/0202154>



Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Insertion bridge

Insertion bridge - EB 3- 8 - 0202141

<https://www.phoenixcontact.com/pc/products/0202141>




Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 41 A

Insertion bridge

Insertion bridge - EB 10- 8 - 0202138

<https://www.phoenixcontact.com/pc/products/0202138>



Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Switching lock

Switching lock - S - 0308359

<https://www.phoenixcontact.com/pc/products/0308359>



Switching lock, for disconnect slides, length: 12 mm, width: 8.2 mm, color: white


Switching jumper

Switching jumper - ASB 2-RTK/S - 0311281

<https://www.phoenixcontact.com/pc/products/0311281>



Switching jumper, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 35 A

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Switching jumper

Switching jumper - USB 2-RTK/S - 0311278

<https://www.phoenixcontact.com/pc/products/0311278>



Switching jumper, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 35 A

Switching jumper

Switching jumper - SB 4-RTK/S - 0311265

<https://www.phoenixcontact.com/pc/products/0311265>



Switching jumper, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 35 A

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>




Switching jumper

Switching jumper - SB 2-RTK/S - 0311236

<https://www.phoenixcontact.com/pc/products/0311236>



Switching jumper, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 35 A

Insertion bridge

Insertion bridge - EB 4- 8 - 0202142

<https://www.phoenixcontact.com/pc/products/0202142>



Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Insertion bridge

Insertion bridge - EB 1/3/5/7-8 - 3072340

<https://www.phoenixcontact.com/pc/products/3072340>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1, 3, 5, 7, color: gray



 Max. current carrying capacity: 41 A

Insertion bridge

Insertion bridge - EB 1/3/5-8 - 3072341

<https://www.phoenixcontact.com/pc/products/3072341>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1,3,5, color: gray



 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Cover

Cover - D-URTK - 0310020

<https://www.phoenixcontact.com/pc/products/0310020>

Cover, length: 72 mm, width: 2.2 mm, height: 41.5 mm, color: gray



Partition plate

Partition plate - TS-RTK - 0310211

<https://www.phoenixcontact.com/pc/products/0310211>

Partition plate, length: 72 mm, width: 0.8 mm, color: gray



Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Partition plate

Partition plate - ATS-RTK - 0310224

<https://www.phoenixcontact.com/pc/products/0310224>

Partition plate, length: 97.5 mm, width: 0.8 mm, height: 45.8 mm, color: gray



Marker card

Marker card - SBS 8:UNBEDRUCKT - 1007235

<https://www.phoenixcontact.com/pc/products/1007235>

Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm



Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Screwdriver

Screwdriver - SZS 1,0X4,0 VDE - 1205066

<https://www.phoenixcontact.com/pc/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Cover profile

Cover profile - AP-ME

METER - 3034361

<https://www.phoenixcontact.com/pc/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Cover profile carrier

Cover profile carrier - APH-ME - 3034374

<https://www.phoenixcontact.com/pc/products/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option

Cover profile carrier

Cover profile carrier - APT-ME - 3034358

<https://www.phoenixcontact.com/pc/products/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Separating plate

Separating plate - TS-UK 6-T - 3072820

<https://www.phoenixcontact.com/pc/products/3072820>



Separating plate, length: 66.5 mm, width: 1 mm, height: 62.5 mm, color: gray

Short-circuit connector

Short-circuit connector - KSS 8 - 0311540

<https://www.phoenixcontact.com/pc/products/0311540>



Short-circuit connector, pitch: 8 mm, color: black

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Short-circuit connector

Short-circuit connector - KSS 4- 8 - 0309549

<https://www.phoenixcontact.com/pc/products/0309549>



Short-circuit connector, pitch: 8 mm, color: black

DIN rail perforated

DIN rail perforated - NS 32 PERF 2000MM-VPE 10 - 1201002

<https://www.phoenixcontact.com/pc/products/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 32 UNPERF 2000MM-VPE 10 - 1201015

<https://www.phoenixcontact.com/pc/products/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/pc/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/pc/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Zack marker strip

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002

<https://www.phoenixcontact.com/pc/products/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Zack marker strip

Zack marker strip - ZB 8 CUS - 0825011

<https://www.phoenixcontact.com/pc/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 - 0818072

<https://www.phoenixcontact.com/pc/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 CUS - 0824597

<https://www.phoenixcontact.com/pc/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 - 0828740

<https://www.phoenixcontact.com/pc/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 CUS - 0829616

<https://www.phoenixcontact.com/pc/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Zack marker strip

Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015

<https://www.phoenixcontact.com/pc/products/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

Zack marker strip

Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028

<https://www.phoenixcontact.com/pc/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

Test disconnect terminal block - URTK/S


0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Marker for terminal blocks

Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413

<https://www.phoenixcontact.com/pc/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/pc/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/pc/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/pc/products/0800886>



End clamp, width: 9.5 mm, color: gray

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

End clamp

End clamp - E/UK - 1201442

<https://www.phoenixcontact.com/pc/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



End clamp

End clamp - E/UK 1 - 1201413

<https://www.phoenixcontact.com/pc/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ 3,5/18/6 FARBLOS - 0311391

<https://www.phoenixcontact.com/pc/products/0311391>



Female test connector, color: transparent

Female test connector

Female test connector - PSBJ 3,5/18/6 BK - 0311388

<https://www.phoenixcontact.com/pc/products/0311388>



Female test connector, color: black

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ 3,5/18/6 GY - 0311375

<https://www.phoenixcontact.com/pc/products/0311375>



Female test connector, color: gray

Female test connector

Female test connector - PSBJ 3,5/18/6 VT - 0311362

<https://www.phoenixcontact.com/pc/products/0311362>



Female test connector, color: violet

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ 3,5/18/6 GN - 0311359

<https://www.phoenixcontact.com/pc/products/0311359>



Female test connector, color: green

Female test connector

Female test connector - PSBJ 3,5/18/6 YE - 0311346

<https://www.phoenixcontact.com/pc/products/0311346>



Female test connector, color: yellow

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ 3,5/18/6 BU - 0311333

<https://www.phoenixcontact.com/pc/products/0311333>



Female test connector, color: blue

Female test connector

Female test connector - PSBJ 3,5/18/6 RD - 0311320

<https://www.phoenixcontact.com/pc/products/0311320>



Female test connector, color: red

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ 3,5/18/6 WH - 0311317

<https://www.phoenixcontact.com/pc/products/0311317>



Female test connector, color: white

Female test connector

Female test connector - PSBJ-URTK/S RD - 0311744

<https://www.phoenixcontact.com/pc/products/0311744>



Female test connector, color: red

Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ-URTK/S BU - 0311757

<https://www.phoenixcontact.com/pc/products/0311757>

Female test connector, color: blue



Female test connector

Female test connector - PSBJ-URTK/S YE - 0311731

<https://www.phoenixcontact.com/pc/products/0311731>

Female test connector, color: yellow



Test disconnect terminal block - URTK/S

0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ-URTK/S GN - 0311760

<https://www.phoenixcontact.com/pc/products/0311760>



Female test connector, color: green

Female test connector

Female test connector - PSBJ-URTK/S VT - 0311773

<https://www.phoenixcontact.com/pc/products/0311773>



Female test connector, color: violet

Test disconnect terminal block - URTK/S



0311087

<https://www.phoenixcontact.com/pc/products/0311087>

Female test connector

Female test connector - PSBJ-URTK/S BK - 0311728

<https://www.phoenixcontact.com/pc/products/0311728>

Female test connector, color: black



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com