

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with spring-cage connection and flat-ribbon cable connector, for mounting on NS 35/7.5, 40-pos.

## Commercial Data

Item number	2293572
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2213
Catalog Page	Page 303 (IF-2011)
GTIN	4017918120474
Weight per Piece (including packing)	146.2 g
Weight per Piece (excluding packing)	144.8 g
Customs tariff number	85369010
Country of origin	DE

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Technical Data

### Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed.
---------	--

### Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	40
No. of channels	2
	4
	6
	8
	16
	32

### Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

No. of channels	24 6 8 16 32
Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Current (per branch)	≤ 1 A

### Air clearances and creepage distances

Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (1.2/50 μs)

### Supported controller ALLEN-BRADLEY SLC 500

Suitable I/O card	1746 OB 32
	1746 OV 32
	1746 IB 32
	1746 IV 32

### Connection data

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	40

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

Insertion/withdrawal cycles	> 50
Pitch	2.54 mm
Connection method	Spring-cage connection
Stripping length	8 mm
Number of positions	40
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14

## Signaling

Status display present	No
------------------------	----

## Dimensions

Width	126 mm
Height	45 mm
Depth	50.42 mm

## Material specifications

Housing insulation material	PVC
-----------------------------	-----

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Standards and regulations

### Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

# UM 45-FLK40/ZFKDS - Interface module




2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Drawings

Circuit diagram

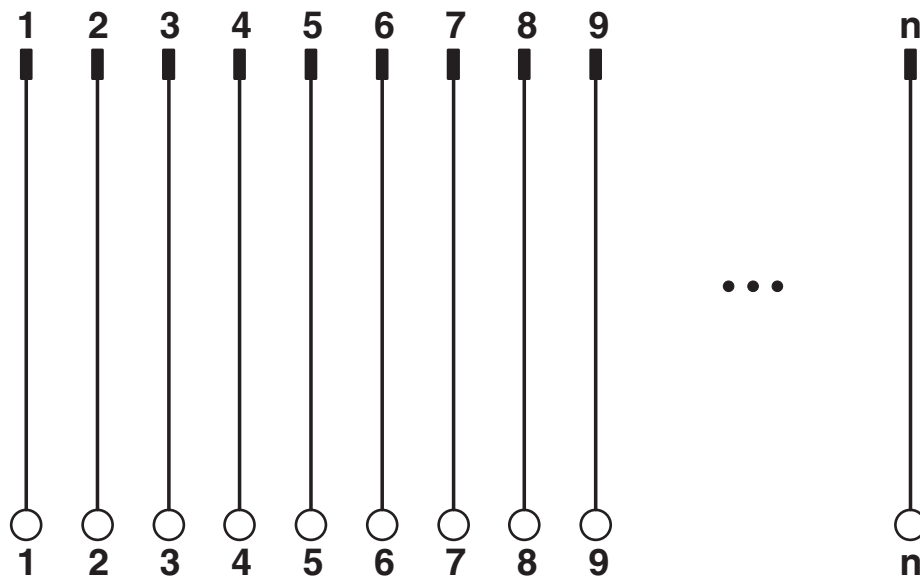

# UM 45-FLK40/ZFKDS - Interface module




2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2293572>

 <b>cUL Recognized</b> Approval ID: FILE E 118976				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	125 V	1 A	-	-

 <b>UL Recognized</b> Approval ID: FILE E 118976				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	125 V	1 A	-	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

### ETIM

ETIM 8.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## Accessories

### SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/in/products/1204504>




Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

---

### FLK EZ-DR.../.../... - Cable

2295059

<https://www.phoenixcontact.com/in/products/2295059>



Round cable, with preassembly, not shielded, variable cable length



# UM 45-FLK40/ZFKDS - Interface module

2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/ 50/KONFEK - Cable

2288985

<https://www.phoenixcontact.com/in/products/2288985>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 0.5 m

---

## FLK 40/EZ-DR/ 100/KONFEK - Cable

2288998

<https://www.phoenixcontact.com/in/products/2288998>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1 m

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/ 150/KONFEK - Cable

2289007

<https://www.phoenixcontact.com/in/products/2289007>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1.5 m

---

## FLK 40/EZ-DR/ 200/KONFEK - Cable

2289010

<https://www.phoenixcontact.com/in/products/2289010>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2 m

# UM 45-FLK40/ZFKDS - Interface module

2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/ 250/KONFEK - Cable

2289023

<https://www.phoenixcontact.com/in/products/2289023>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2.5 m

---

## FLK 40/EZ-DR/ 300/KONFEK - Cable

2289036

<https://www.phoenixcontact.com/in/products/2289036>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3 m

# UM 45-FLK40/ZFKDS - Interface module

2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/ 350/KONFEK - Cable

2289049

<https://www.phoenixcontact.com/in/products/2289049>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3.5 m

---

## FLK 40/EZ-DR/ 400/KONFEK - Cable

2289052

<https://www.phoenixcontact.com/in/products/2289052>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 4 m

# UM 45-FLK40/ZFKDS - Interface module

2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/ 600/KONFEK - Cable

2299589

<https://www.phoenixcontact.com/in/products/2299589>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 6 m

---

## FLK 40/EZ-DR/ 800/KONFEK - Cable

2299592

<https://www.phoenixcontact.com/in/products/2299592>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 8 m

# UM 45-FLK40/ZFKDS - Interface module



2293572

<https://www.phoenixcontact.com/in/products/2293572>

## FLK 40/EZ-DR/1000/KONFEK - Cable

2299602

<https://www.phoenixcontact.com/in/products/2299602>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 10 m

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)